# GHA300F

Ordering information

A 300











High voltage pulse noise type : EAP series Low leakage current type : EAM series

\*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

1)Series name
2)Single output
3)Output wattage
4)Universal input
5)Output voltage

®Optional \*6 T3: mounting hole M3 : VH(J.S.T.)connector type

J3 : Horizontal input connector VH(J.S.T.)connector type R3 : with Subfeatures (5VAUX,12VAUX,Remote, Power good)

Specification is changed at option, refer to Instruction manual.

This power supply is manufactured by SMD technology. The stress to P.C.B like twisting or bending causes the defect of the unit, please handle the unit with care \*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL		GHA300F-12	GHA300F-24	GHA300F-48
MAX OUTPUT WATTAGE[W]		300	300	302.4
	Forced air at 50°C	12V 25A	24V 12.5A	48V 6.3A
DC OUTPUT	Convection at 40℃	12V 8.4A	24V 4.2A	48V 2.1A
	at 50°C	12V 4.5A	24V 2.2A	48V 1.1A

	MODEL		GHA300F-12	GHA300F-24	GHA300F-48			
V	/OLTAGE[V]		AC90 - 264 1 $\phi$ (output derating is	required at AC90V -115V *3)				
	NUDDENTIAL	ACIN 120V	3.3typ					
	CURRENT[A]	ACIN 230V						
F	REQUENCY[Hz]		50 / 60 (47 - 63)					
_		ACIN 120V		90typ	90typ			
NPUT   E	FFICIENCY[%]	ACIN 230V	91typ	92typ	92typ			
P			0.95typ					
	(lo=100%)	ACIN 230V						
			Otyp (Io=100%) (At cold start) (Ta=25℃)					
	NHUSH CUNNENT[A]	ACIN 230V	40typ (Io=100%) (At cold start) (Ta	a=25℃)				
L	EAKAGE CURREN	T[mA]	0.125/0.250max (ACIN 120V/240V	60Hz,lo=100%, According to IEC60	0601-1)			
V	/OLTAGE[V]		12	24	48			
		Forced air		12.5	6.3			
		Convection		2.2	1.1			
	INE REGULATION[I		48max	96max	192max			
L	OAD REGULATION			150max	240max			
	RIPPLE[mVp-p] *1		240max	240max	300max			
<u>  '</u>	m i EE[mvp p]		320max	320max	400max			
OUTPUT R	RIPPLE NOISE[mVp-p]*1		300max	300max	480max			
,011 01	III I EE NOIOE[IIIVP P]		360max	360max	500max			
TE	EMPERATURE REGULATION[mV]		120max	240max	480max			
			150max	290max	600max			
	DRIFT[mV]	*2	48max	96max	192max			
	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%)					
	HOLD-UP TIME[ms]		16typ (ACIN 120V, Io=100%)					
	UTPUT VOLTAGE ADJUSTMENT		10.80 to 13.20	21.60 to 26.40	43.20 to 52.80			
	OUTPUT VOLTAGE SET		12.00 to 12.48	24.00 to 24.96	48.00 to 49.92			
	OVERCURRENT PROT		Works over 105% of rating and red					
	OVERVOLTAGE PROTEC	CTION[V]		27.60 to 33.60	55.20 to 67.20			
IDCLUT AND	AUX1 (12V1A)		Optional					
THERE A	AUX2 (5V1A)		Optional					
	REMOTE ON/OFF		Optional					
	PowerGood	A1137	Optional AC4.000V 1minute. Cutoff current = 10mA, DC500V 50M $\Omega$ min (At Room Temperature) 2MOPP					
	NPUT-OUTPUT · RC ·	AUX *7						
	NPUT-FG	FO :-	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1MOPP					
	OUTPUT RC · AUX-							
	DUTPUT-RC · AUX PERATING TEMP., HUMID, AND							
	TORAGE TEMP.,HUMID.AND	ALIIIUDE						
			10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis 196.1m/s² (20G), 11ms, once each X, Y and Z axis					
	MPACT				01 1) FNC00E0 1 FNC0C01 1 2 d			
AFETY AND	AGENCY APPROVAL	_S	UL60950-1, ANSI/AAMI ES60601-1, C-UL(CSA60950-1, CAN/CSA60601-1), EN60950-1, EN60601-1 3rd,					
IOISE	CONDUCTED NOISE		Complies with DEN-AN, IEC60601-1-2 4th Ed. Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B					
	HARMONIC ATTENU		Complies with IEC61000-3-2 (class		NDDUZZ-B			
	CASE SIZE/WEIGHT		76.2×35×127mm [3.0×1.4×5.0 inches] (W×H×D) / 400g max  Convection, Forced air (Require external fan)					
	COLING WE I HOD		Convection, roiced an (neguire ex	terriar rail)				


- \*1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- \*3 Derating is required.
- Please contact us about dynamic load and input response.
- \*5 Please contact us about another class.

- Specification is changed at option, refer to Instruction Manual.
- Applicable when AUX and remote control (optional) is added.
- To meet the specifications. Do not operate over-loaded condition.
- Sound noise may be generated by power supply in case of pulse load. Parallel operation is not possible.
- Forced air cooling is required to output up to MAX OUTPUT WATTAGE.
- Bottom layer P.C.B has electric potential which is required isolation from FG by clearance or creepage as the safety design issue.




- · High Power density:14.3W/inch3
- · High efficiency 92% typ (Input Voltage 230V, Output Voltage 24V)
- · 3"× 5 "standard footprint
- · Fits 1U applications
- Industrial and Medical safety approvals
- · Low leakage current
- With Remote On/Off (Optional)
- With AUX1 (12V), AUX2 (5V) (Optional)
- · No minimum load is required

### **Block diagram**

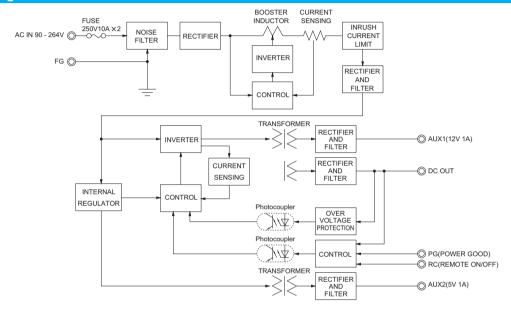

#### **External view**

\*External size of option J3 is different from standard model and refer to 5 Option and Others of instruction manual for details.

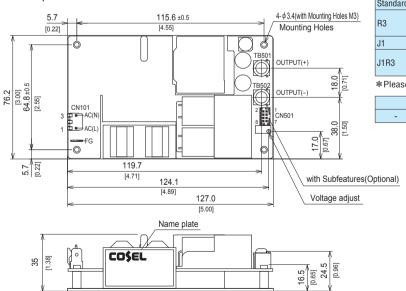

- \*\* Tolerance ±1 [±0.04]
- Weight: 400g max
- X There is a total of four attachment holes.
- \* This power supply requires mounting on metal standoffs 5mm in height.
  - (Insulating sheet is required if you do not use a spacer).
- Dimensions in mm, [ ]=inchesScrew tightening torque : (TB501, 502) : 1.5N · m max
- Mounting toque: 0.6N · m max
   Avoid contact between TB501 and 502 wiring with mounting parts.
- Option : -J1 : (J.S.T) connector type. Refer to Instruction Manual 5.

	Connector			Terminal	Mfr
Standard	CN101	A-41671-A03A197-2	00-50-8031	08-50-0105	Molex *
R3	CN101	A-41071-A00A197-2	03-30-0031	08-65-0114	
CN501		087831-0820	51110-0851	50394-8051	
J1	CN101	B2P3-VH	VHR-3N	SVH-21T-P1.1	J.S.T.
J1R3	CN101	DZF3-VII	VIIV-9IN	ЗVП-211-Р1.1	
JINO	CN501	B8B-PHDSS	PHDR-08VS	SPHD-002T-P0.5	

\*Please note the pin position No.1 is different from Molex.

FG		Mating connector	Terminal	Mfr	
-	250 Series	-	170603-2	Tyco Electronics	

### <Pin Assignments>

#### <CN101>

10.1.0.7				
Pin No.	Input			
1	AC(L)			
2				
3	AC(N)			

## <CN501(Optional)>

Pin No.	Function
1	AUX1 : AUX1 (12V1A)
2	AUX1G: AUX1 (GND)
3	RC : REMOTE ON/OFF
4	RCG : REMOTE ON/OFF (GND)
5	PG : Power good
6	PGG : Power good (GND)
7	AUX2 : AUX2 (5V1A)
8	AUX2G: AUX2 (GND)



CN501

### Ordering information

# GHA500F







High voltage pulse noise type : EAP series Low leakage current type : EAM series

\*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply. 1 Series name 2 Single output 3 Output wattage

3 Output wattage 4 Universal input 5 Output voltage 6 Optional \*6

T3 : mounting hole M3 J1 : VH(J.S.T.)connector type J3 : Horizontal input connector VH(J.S.T.)connector type

R3 : with Subfeatures (5VAUX,12VAUX,Remote, Power good)

P : Parallel Operation

Specification is changed at option, refer to Instruction manual.

This power supply is manufactured by SMD technology. The stress to P.C.B like twisting or bending causes the defect of the unit, please handle the unit with care \*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL			GHA500F-12	GHA500F-15	GHA500F-24	GHA500F-30	GHA500F-48	GHA500F-56
MAX OUTPUT WAT	TTAGE[W]		500.4	501	504	501	504	504
	Forced air at	<b>50</b> ℃	12V 41.7A	15V 33.4A	24V 21.0A	30V 16.7A	48V 10.5A	56V 9.0A
Convection	Convection at	<b>40</b> ℃	12V 12.5A	15V 10.0A	24V 6.3A	30V 5.0A	48V 3.2A	56V 2.7A
DC OUTPUT	at	<b>50</b> ℃	12V 9.2A	15V 7.4A	24V 4.6A	30V 3.7A	48V 2.3A	56V 1.9A
	conduction at	0℃	12V 30.0A	15V 24.0A	24V 15.0A	30V 12.0A	48V 7.5A	56V 6.4A
	cooling	<b>50</b> ℃	12V 16.7A	15V 13.4A	24V 8.4A	30V 6.7A	48V 4.2A	56V 3.6A

	MODEL		GHA500F-12	GHA500F-15	GHA500F-24	GHA500F-30	GHA500F-48	GHA500F-56	
	VOLTAGE[V]		AC90 - 264 1 φ (	AC90 - 264 1 φ (output derating is required at AC90V -115V *3)					
	CUDDENTIAL	ACIN 120V							
	CURRENT[A]		2.9typ						
	FREQUENCY[Hz]		50 / 60 (47 - 63)						
	EFFICIENCY[%]	ACIN 120V	88typ	90typ	90typ	90typ	90typ	90typ	
INPUT	EFFICIENCY[%]	ACIN 230V	90typ	92typ	92typ	92typ	92typ	92typ	
	POWER FACTOR	ACIN 120V	0.95typ						
	(lo=100%)								
	INDUCH CUDDENTIAL	ACIN 120V	20typ (lo=100%)	) (At cold start) (T	a=25℃)				
	INRUSH CURRENT[A] ACIN 230V		40typ (Io=100%) (At cold start) (Ta=25°C)						
	LEAKAGE CURREN	T[mA]		(ACIN 120V/240V		According to IEC6			
	VOLTAGE[V]		12	15	24	30	48	56	
		Forced air		33.4	21.0	16.7	10.5	9.0	
	CURRENT[A]	Convection		7.4	4.6	3.7	2.3	1.9	
		conduction cooling		13.4	8.4	6.7	4.2	3.6	
	LINE REGULATION[			60max	96max	120max	192max	192max	
	LOAD REGULATION			120max	150max	180max	240max	240max	
	RIPPLE[mVp-p] *1	0 to +50°C	240max	240max	240max	300max	300max	400max	
	MIPPEE[IIIVP-P]	-20 - 0°C	320max	320max	320max	400max	400max	500max	
OUTPUT	DIDDLE NOICE(mVm m1st	0 to +50°C	300max	300max	300max	480max	480max	500max	
	RIPPLE NOISE[mVp-p]*1	-20 - 0°C	360max	360max	360max	500max	500max	580max	
	TEMPERATURE REGULATION[mV]	0 to +50°C	120max	150max	240max	300max	480max	480max	
		-20 to +50°C	150max	180max	290max	360max	600max	600max	
			1011107	60max	96max	120max	192max	192max	
	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%)						
	HOLD-UP TIME[ms]		16typ (ACIN 120V, Io=100%)						
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		10.80 to 13.20	13.50 to 16.50	21.60 to 26.40	27.00 to 31.50	43.20 to 52.80	52.00 to 56.00	
	<b>OUTPUT VOLTAGE SET</b>		12.00 to 12.48	15.00 to 15.30	24.00 to 24.96	30.00 to 31.20	48.00 to 49.92	55.00 to 56.00	
	OVERCURRENT PROT			% of rating and re					
PROTECTION	OVERVOLTAGE PROTEC	CTION[V]	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	34.50 to 42.00	55.20 to 67.20	60.00 to 69.00	
CIRCUIT AND	AUX1 (12V1A)		Optional						
OTHERS	AUX2 (5V1A)		Optional						
UITIENS	REMOTE ON/OFF		Optional						
	PowerGood		Optional						
	INPUT-OUTPUT · RC	· AUX *7							
ISOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1MOPP						
ISOLATION	OUTPUT · RC · AUX-	FG *7	AC500V 1minute, Cutoff current = 25mA, DC500V 50M $\Omega$ min (At Room Temperature)						
	OUTPUT-RC · AUX		AC500V 1minute, Cutoff current = 25mA, DC500V 50M $\Omega$ min (At Room Temperature)						
OPERATING TEMP., HUI						m (10,000feet) ma			
ENVIRONMENT	STORAGE TEMP., HUMID. AND	ALTITUDE							
LINVINONNIENI	VIBRATION					tes each along X, \	and Z axis		
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis						
SAFETY AND	AGENCY APPROVAL						1 3rd, Complies with DEN-	AN, IEC60601-1-2 4th Ed	
NOISE	CONDUCTED NOISE					2-B, EN55011-B, E	N55022-B		
REGULATIONS	HARMONIC ATTENU			C61000-3-2 (clas					
OTHERS	CASE SIZE/WEIGHT			nm [3.0×1.4×5.0					
COOLING METHOD			Convection, Forced air (Require external fan), Conduction cooling						

- \*1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).


  \*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- \*3 Derating is required.
- \*4 Please contact us about dynamic load and input response.

- \*5 Please contact us about another class.
- \*6 Specification is changed at option, refer to Instruction Manual.
- \*7 Applicable when AUX and remote control (optional) is added.
- \* To meet the specifications. Do not operate over-loaded condition.
- \* Sound noise may be generated by power supply in case of pulse load.
- Parallel operation is available with -P option. Refer to 5.1on the instruction manual.
   Forced air cooling is required to output up to MAX OUTPUT WATTAGE.




- · Wattage 500W max
- · High Power density:24.1W/inch3
- · High efficiency 92% typ (Input Voltage 230V,Output Voltage 24V)
- · Conduction cooling
- 3 " × 5 "standard footprint
- · Fits 1U applications
- Industrial and Medical safety approvals
- · Low leakage current
- · With Remote On/Off (Optional)
- · With AUX1 (12V), AUX2 (5V) (Optional)
- · No minimum load is required

# **Block diagram**

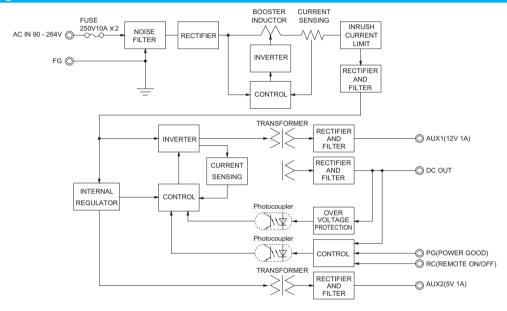

### **External view**

\*External size of option J3 is different from standard model and refer to 5 Option and Others of instruction manual for details.

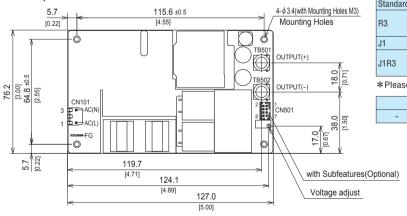

	INAI	ne piate	
35	COŞEL		16.5 [0.65] 24.5 [0.36]

- X Tolerance ±1 [±0.04]
- Weight: 420g max
- X There is a total of four attachment holesX Base Plate : Aluminum
- ※ Dimensions in mm, [ ]=inches
- Screw tightening torque: (TB501, 502): 1.5N · m max
  Mounting toque: 0.6N · m max
- Avoid contact between TB501 and 502 wiring with mounting parts.
- ※ Option: -J1: (J.S.T) connector type. Refer to Instruction Manual 5.

#### Mating Connector Terminal Mfr connector Standard CN101 08-50-0105 A-41671-A03A197-2 09-50-8031 08-65-0114 CN101 Molex \* 50394-8051 CN501 087831-0820 51110-0851 CN101 B2P3-VH VHR-3N SVH-21T-P1.1 CN101 J.S.T. CN501 B8B-PHDSS PHDR-08VS SPHD-002T-P0.5

\*Please note the pin position No.1 is different from Molex.

FG		Mating connector	Terminal	Mfr	
-	250 Series	-	170603-2	Tyco Electronics	

#### <Pin Assignments>

# <CN101>

Pin No.	Input
1	AC(L)
2	
3	AC(N)

#### <CN501(Optional)>

Pin No.	Function
1	AUX1 : AUX1 (12V1A)
2	AUX1G: AUX1 (GND)
3	RC : REMOTE ON/OFF
4	RCG : REMOTE ON/OFF (GND)
5	PG : Power good
6	PGG : Power good (GND)
7	AUX2 : AUX2 (5V1A)
8	AUX2G: AUX2 (GND)




CN501

# **GHA300F-SNF**

A 300



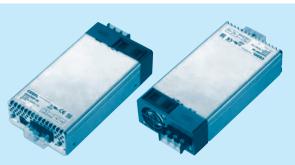



High voltage pulse noise type : EAP series Low leakage current type : EAM series

\*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

1)Series name
2)Single output
3)Output wattage
4)Universal input
5)Output voltage

®Optional \*6

J1: CN501 PH(J.S.T.)connector type

Refer to the instruction manual

\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL		GHA300F-12-SNF	GHA300F-24-SNF	GHA300F-48-SNF	
MAX OUTPUT WATTAGE[W]		300	300	302.4	
DC OUTPUT Forced air +50℃		12V 25.0A	24V 12.5A	48V 6.3A	

	MODEL		GHA300F-12-SNF	GHA300F-24-SNF	GHA300F-48-SNF				
	VOLTAGE[V]		AC90 - 264 1 $\phi$ (output derating is	required at AC90V -115V *3)					
	CURRENT[A]	ACIN 120V							
	ACIN 230V		1.8typ						
	FREQUENCY[Hz]		50 / 60 (47 - 63)						
	EFFICIENCY[%]	ACIN 120V		89typ	89typ				
NPUT		ACIN 230V		91typ	91typ				
			0.95typ						
	(lo=100%)								
	INRUSH CURRENT[A]		20typ (Io=100%) (At cold start) (Ta						
			40typ (lo=100%) (At cold start) (Ta						
	LEAKAGE CURRENT[mA]		0.125/0.250max (ACIN 120V/240V 60Hz,Io=100%, According to IEC60601-1)						
	VOLTAGE[V]		12	24	48				
		Forced air		12.5	6.3				
}	LINE REGULATION		48max	96max	192max				
-	LOAD REGULATION			150max	240max				
	RIPPLE[mVp-p] *1		240max 320max	240max 320max	300max 400max				
ŀ			300max	300max	480max				
UTPUT	RIPPLE NOISE[mVp-p]*1		360max	360max	500max				
JOIPOI			120max	240max	480max				
	TEMPERATURE REGULATION[mV]		150max	290max	600max				
-	DRIFT[mV] *2			96max	192max				
-	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%)						
	HOLD-UP TIME[ms]		16typ (ACIN 120V, Io=100%)						
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		10.80 to 13.20	21.60 to 26.40	43.20 to 52.80				
ŀ	OUTPUT VOLTAGE SETTING[V]		12.00 to 12.48	24.00 to 24.96	48.00 to 49.92				
	OVERCURRENT PROT		Works over 105% of rating and red	I .	10:00 to 10:02				
İ	OVERVOLTAGE PROTECTION[V]		13.80 to 16.80	27.60 to 33.60	55.20 to 67.20				
ROTECTION	AUX1		10V 0.5A						
RCUIT AND	AUX2		5V 1A						
	REMOTE ON/OFF		Possible, AUX2 is available						
Ī	PowerGood		Open corrector						
ĺ	INPUT-OUTPUT · RC	AUX	AC4,000V 1minute, Cutoff current = 10mA, DC500V 50M $\Omega$ min (At Room Temperature) 2MOPP						
COL ATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1MOPP						
SOLATION	OUTPUT · RC · AUX-	FG	AC500V 1minute, Cutoff current = 25mA, DC500V 50M $\Omega$ min (At Room Temperature)						
	OUTPUT-RC · AUX		AC500V 1minute, Cutoff current = 25mA, DC500V 50M $\Omega$ min (At Room Temperature)						
	OPERATING TEMP., HUMID. AND	ALTITUDE							
	STORAGE TEMP., HUMID. AND	ALTITUDE	-30 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max						
INVIRONMENT	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis						
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis						
AFETY AND	AGENCY APPROVAL	S	UL60950-1, ANSI/AAMI ES60601-1, C-UL(CSA60950-1, CAN/CSA60601-1), EN60950-1, EN60601-1 3rd,						
IOISE			Complies with DEN-AN, IEC60601-1-2 4th Ed.						
EGULATIONS	CONDUCTED NOISE			PR11-B, CISPR22-B, EN55011-B, E	EN55022-B				
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (class A) *5						
OTHERS	CASE SIZE/WEIGHT		85.2×41×165.3mm [3.35×1.61×	6.5 inches] (W×H×D) / 620g max					
	COOLING METHOD		Forced air						


- \*1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). \*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with
- the input voltage held constant at the rated input/output. \*3 Derating is required.
- \*4 Please contact us about dynamic load and input response

- Please contact us about another class.
- \*6 Specification is changed at option, refer to Instruction Manual.
- \*7 When output current more than rated, output will shut down after 5 seconds or more, Recycle input after 3 minutes to reset the protection.
- To meet the specifications. Do not operate over-loaded condition. Sound noise may be generated by power supply in case of pulse load.




- · Full packaged desin united with GHA's features and additional robastness..
- · High efficiency 91% typ (Input voltage 230V,Output voltage 24V)
- · Optical for 1U applications
- · Medical and Industrial safety approvals
- · Low leakage current
- · Conformal coating
- · Single remote ON/OFF control for DC output, AUX1 and Fan.
- · Isolated dual AUX (AUX1 10V 0.5A, AUX2 5V 1A)

### **Block diagram**

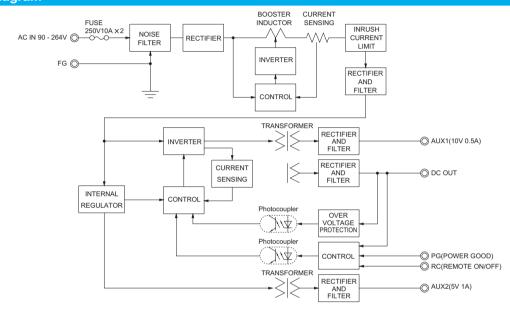

# **External view**

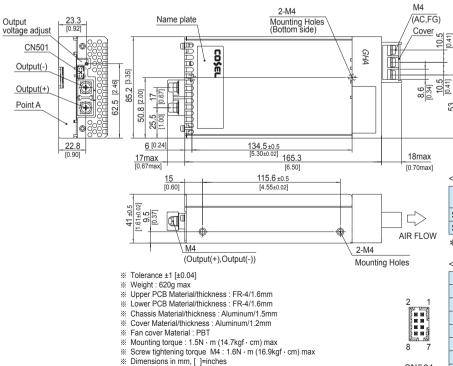

<CN501 mating connector and terminal>

FG

AC(N)

AC(L)

Co	nnector	Mating connector	Terminal	Mfr
SNF	087833-6320	51110-0851	50394-8051	Molex *
SNFJ1	S8B-PHDSS	PHDR-08VS	SPHD-002T-P0.5	J.S.T.

\*Please note the pin position No.1 is different from Molex.


#### <CN501>

Pin No.	Function
1	AUX1 : AUX1 (10V0.5A)
2	AUX1G: AUX1 (GND)
3	RC : REMOTE ON/OFF
4	RCG : REMOTE ON/OFF (GND)
5	PG : Power good
6	PGG : Power good (GND)
7	AUX2 : AUX2 (5V1A)
8	AUX2G: AUX2 (GND)

# **GHA500F-SNF**

A 500



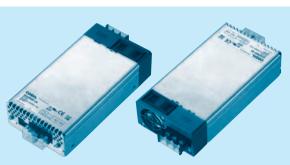



High voltage pulse noise type : EAP series Low leakage current type : EAM series

\*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

1) Series name
2) Single output
3) Output wattage
4) Universal input
5) Output voltage

®Optional \*6 J1: CN501

PH(J.S.T.)connector type P : Parallel Operation

Refer to the instruction manual

\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL		GHA500F-12-SNF	GHA500F-15-SNF	GHA500F-24-SNF	GHA500F-30-SNF	GHA500F-48-SNF	GHA500F-56-SNF
MAX OUTPUT WATTAGE[W]		450	501	504	501	504	504
DC OUTPUT	Forced air +50°C	12V 37.5A	15V 33.4A	24V 21.0A	30V 16.7A	48V 10.5A	56V 9.0A

	MODEL		GHA500F-12-SNF	GHA500F-15-SNF	GHA500F-24-SNF	GHA500F-30-SNF	GHA500F-48-SNF	GHA500F-56-SNF		
	VOLTAGE[V]		AC90 - 264 1 φ (	output derating is r	equired at AC90V -	115V *3)				
	CURRENT[A] ACIN 120V		4.8typ 5.4typ							
	CONNENT[A]	ACIN 230V	2.6typ 2.9typ							
	FREQUENCY[Hz]		50 / 60 (47 - 63)							
	EFFICIENCY[%]	ACIN 120V	87typ	89typ	89typ	89typ	89typ	89typ		
INPUT	EFFICIENCY[%]	ACIN 230V	89typ	91typ	91typ	91typ	91typ	91typ		
	POWER FACTOR	ACIN 120V	0.95typ							
	(lo=100%)	ACIN 230V	0.90typ							
	INRUSH CURRENT[A]		20typ (Io=100%)	(At cold start) (Ta	a=25℃)					
	INNOSTI CONNENT[A]	ACIN 230V	40typ (Io=100%)							
	LEAKAGE CURREN	T[mA]	0.125/0.250max (ACIN 120V/240V 60Hz,lo=100%, According to IEC60601-1)							
	VOLTAGE[V]		12	15	24	30	48	56		
		Forced air		33.4	21.0	16.7	10.5	9.0		
	LINE REGULATION[			60max	96max	120max	192max	192max		
	LOAD REGULATION			120max	150max	180max	240max	240max		
	RIPPLE[mVp-p] *1		240max	240max	240max	300max	300max	400max		
	······································		320max	320max	320max	400max	400max	500max		
	RIPPLE NOISE[mVp-p]*1		300max	300max	300max	480max	480max	500max		
OUTPUT	MIFFEE NOISE[IIIVP-P]**		360max	360max	360max	500max	500max	580max		
	TEMPERATURE REGULATION[mV]		120max	150max	240max	300max	480max	480max		
			150max	180max	290max	360max	600max	600max		
			48max	60max	96max	120max	192max	192max		
	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%)							
	HOLD-UP TIME[ms]		16typ (ACIN 120)							
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		10.80 to 13.20	13.50 to 16.50	21.60 to 26.40	27.00 to 31.50	43.20 to 52.80	52.00 to 56.00		
	OUTPUT VOLTAGE SETTING[V]		12.00 to 12.48	15.00 to 15.30	24.00 to 24.96	30.00 to 31.20	48.00 to 49.92	55.00 to 56.00		
	OVERCURRENT PROT		Works over 105% of rating and recovers automatically *7							
PROTECTION			13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	34.50 to 42.00	55.20 to 67.20	60.00 to 69.00		
CIRCUIT AND	AUX1		12V 0.5A							
OTHERS	AUX2		5V 1A							
	REMOTE ON/OFF		Possible, AUX2 is available							
	PowerGood		Open corrector							
	INPUT-OUTPUT · RC	AUX	AC4,000V 1minute, Cutoff current = 10mA, DC500V 50M $\Omega$ min (At Room Temperature) 2MOPP							
ISOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M $\Omega$ min (At Room Temperature) 1MOPP							
	OUTPUT · RC · AUX-	FG	AC500V 1minute, Cutoff current = 25mA, DC500V 50M $\Omega$ min (At Room Temperature)							
	OUTPUT-RC · AUX		AC500V 1minute, Cutoff current = 25mA, DC500V 50M $\Omega$ min (At Room Temperature)							
	OPERATING TEMP., HUMID. AND		-20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max *3							
ENVIRONMENT	STORAGE TEMP., HUMID. AND	ALTITUDE	-30 to +80°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max							
	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis 196.1m/s² (20G), 11ms, once each X, Y and Z axis							
	IMPACT					2.4.0411/0040000	14 4) FNCOOFC 1	ENICOCO4 4 C 1		
SAFETY AND	AGENCY APPROVAL	_S				D-1, CAN/CSA6060	) I - I), EN60950-1,	EN60601-1 3rd,		
NOISE	CONDUCTED NOISE			EN-AN, IEC60601-		D ENEEDII D EN	IEEOOO D			
REGULATIONS	CONDUCTED NOISE					-B, EN55011-B, EN	100022-B			
	HARMONIC ATTENU			C61000-3-2 (class		VD) / CCOm mc				
OTHERS	CASE SIZE/WEIGHT			IIIIII [3.35 × 1.61 ×	6.5 inches] (W×H	אטן / bbug max				
	COOLING METHOD		Forced air							


- \*1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). \*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- \*3 Derating is required.
- \*4 Please contact us about dynamic load and input response

- Please contact us about another class.
- Specification is changed at option, refer to Instruction Manual.
- When output current more than rated, output will shut down after 5 seconds or more, Recycle input after 3 minutes to reset the protection.
- To meet the specifications. Do not operate over-loaded condition.
- Sound noise may be generated by power supply in case of pulse load.
- Parallel operation is available with -P option. Refer to 5.1on the instruction manual.




- · Full packaged design united with GHA's features, and additional robustness..
- · High efficiency 91% typ (Input voltage 230V,Output voltage 24V)
- · 50% minimized size compares with previous products.
- · Optical for 1U applications
- · Medical and Industrial safety approvals
- · Low leakage current
- · Conformal coating
- · Single remote ON/OFF control for DC output, AUX1 and Fan.
- · Isolated dual AUX (AUX1 12V 0.5A, AUX2 5V 1A)

### **Block diagram**

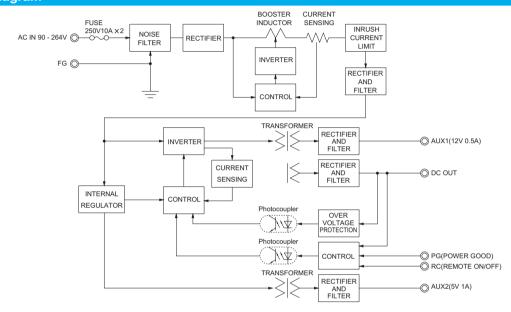

#### **External view**

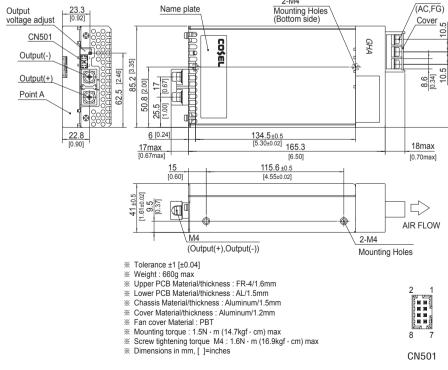



FG

AC(N)

AC(L)

Co	nnector	Mating connector	Terminal	Mfr
SNF	087833-6320	51110-0851	50394-8051	Molex *
SNFJ1	S8B-PHDSS	PHDR-08VS	SPHD-002T-P0.5	J.S.T.

\*Please note the pin position No.1 is different from Molex.

#### <CN501>

M4

Pin No.	Function
1	AUX1 : AUX1 (12V0.5A)
2	AUX1G: AUX1 (GND)
3	RC : REMOTE ON/OFF
4	RCG : REMOTE ON/OFF (GND)
5	PG : Power good
6	PGG : Power good (GND)
7	AUX2 : AUX2 (5V1A)
8	AUX2G: AUX2 (GND)